



### Characteristics 性能数据


|   |                |
|---|----------------|
| Capacity to 3.0V (@0.5A @1% duty cycle )..... | 19Ah           |
| 容量  |                |
| Nominal voltage.....                          | 3.6v           |
| 额定电压  |                |
| Maximum 1 second pulse to 3.0V .....          | 3.0A           |
| 最大脉冲时间 ( 1sec )                               |                |
| Maximum pulse length @0.8A to 2.8V .....      | 1000sec        |
| 最大脉持续时间                                       |                |
| Delay time to 3.0V @ 3A.....                  | No Delay       |
| 滞后时间  |                |
| Weight.....                                   | 约140g          |
| 重量  |                |
| Operating temperature range.....              | -40°C to +85°C |
| 工作温度范围  |                |
| Capacity retention rate after 10 years.....   | 96%            |
| 容量保持率   |                |

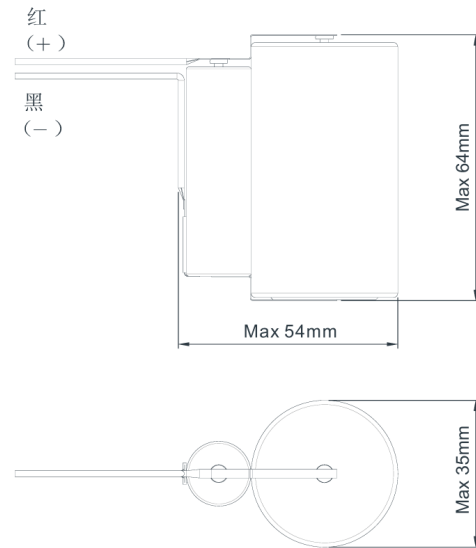


### Discharge characteristic (+25°C) (放电特性)

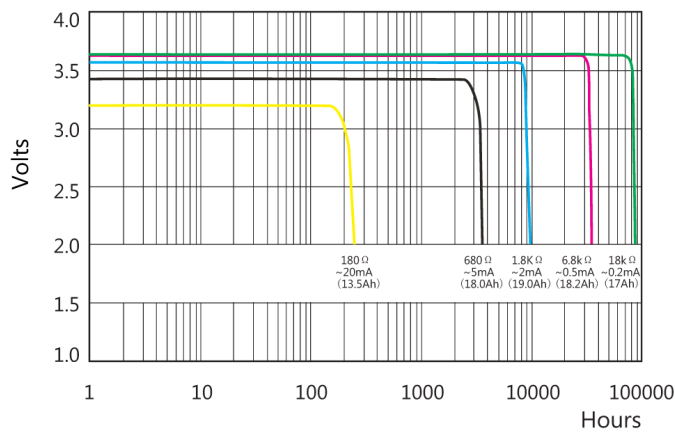

### Voltage and Pulse Duration (电压和脉冲持续时间)

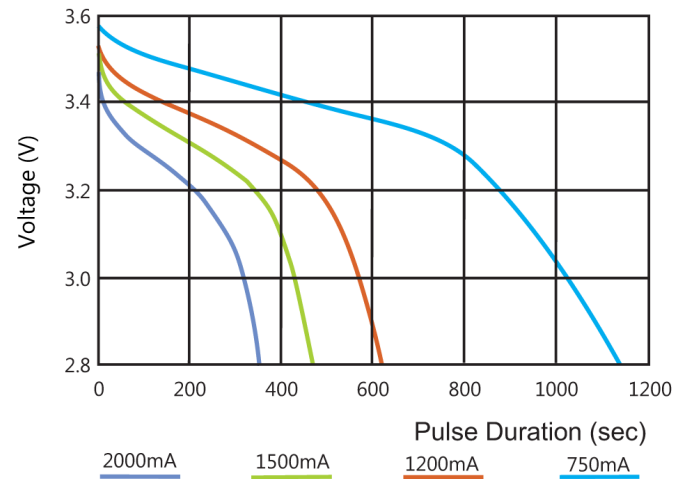

### Self - discharge and Temperature (自放电和温度)

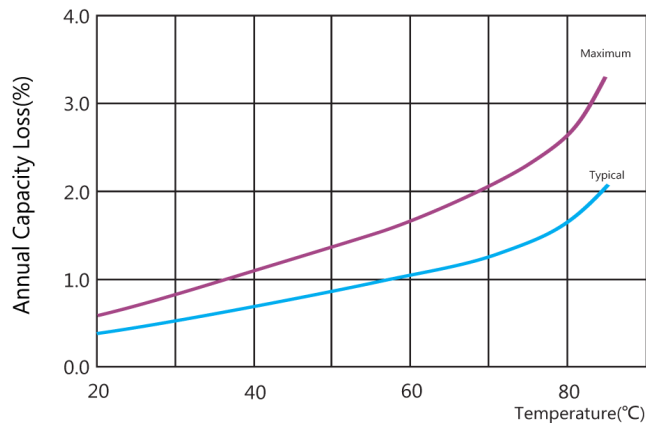

### Capacity and Current (容量和电流)

